


# LED Lighting for Vessel Use

## Aisle Light CNL-01series

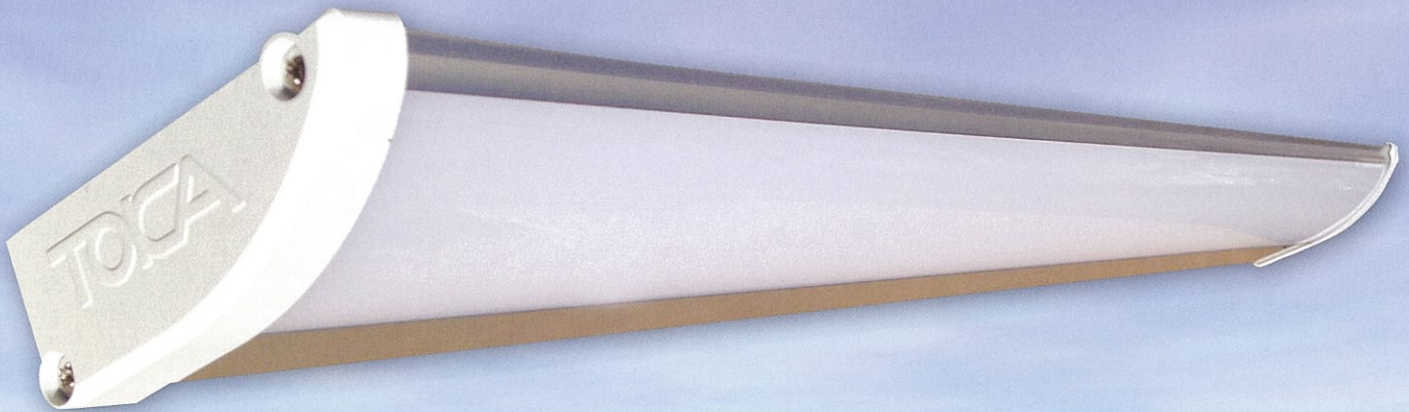

### Specification

Model	CNL-01
Voltage (V)	AC100 ~ 240
Wattage (W)	19
Power Factor (PF) (%)	90Min
Color Temperature (K)	6,000
Luminous Flux (lm)	1,900
Illuminance (lx) Distance 1m	-----
Illuminance (lx) Distance 2m	140 (Reference)
Dimension (L×W×H) (mm)	602×73×34
Weight (Kg)	1.0
Protection Class	NIL (IP40 Equivalent)
Life (hour)	40,000 (Note 1)
Operating temperature (°C)	-30°C ~ +50°C

- Thin-design (25mm) and a self-powered ceiling
- Long life, minimize the waste cost for replacement of fluorescent lamp, also respond to Restricting the use of Hazardous Substance (RoHS)
- DC24V1W Option for emergency lamp

Material)

Metal Frame : Aluminum  
Resin Frame : Polycarbonate

Note 1) In case of operating temperature  
-30 to +50 deg C.

**TOKA** TOKA SEIKI CO.,LTD.